

SURENOO DISPLAY USER MANUAL

SLC0801C Series

Please click the following image to buy the sample



Controller: AIP31066 or Equal




Shenzhen Surenoo Technology Co.,Ltd.
www.surenoo.com

Surenoo Character LCD Selection Guide

Y 01	08X01	16X01			
Y 02	08X02	16X02	20X02	24X02	40X02
Y 03					
Y 04		16X04	20X04		40X04
	X 08	X 16	X 20	X 24	X 40



Surenno Character LCD Module List (1604 / 1601)

 Surenno 1604 Character LCD Module	 Surenno 1604 Character LCD Module	 Surenno 1601 Character LCD Module	 Surenno 1601 Character LCD Module
Model No.: SLC1604A Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 87.00*60.00MM Entend Function: IIC, LCD2USB, RS232/UART 	Model No.: SLC1604B Controller: AIP31066 & PCF8574T Interface: Parallel & IIC Outline Size: 87.00*60.00MM Keyword: - 	Model No.: SLC1601A Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 80.00*36.00MM Keyword: - 	Model No.: SLC1601B Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 122.00*33.00MM Keyword: -

(0802)


 Surenno 0802 Character LCD Module	 Surenno 0802 Character LCD Module		
Model No.: SLC0802A Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 40.00*35.80MM Entend Function: IIC 	Model No.: SLC0802B Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 58.00*32.00MM Entend Function: IIC, RS232/UART 		

(0801)

 Surenno 0801 Character LCD Module	 Surenno 0801 Character LCD Module	 Surenno 0801 Character LCD Module	 Surenno 0801 Character LCD Module
Model No.: SLC0801A Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 85.00*29.50MM Entend Function: IIC 	Model No.: SLC0801B Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 58.00*27.00MM Entend Function: IIC 	Model No.: SLC0801C Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 84.00*44.00MM Entend Function: IIC 	Model No.: SLC0801D Controller: AIP31066 or Equal Interface: 4-/8- Bit Parallel Outline Size: 39.80*27.50MM Keyword: PH=2.0MM

Matched PCB Adapter/Shield for Surenoo Character LCD Module

Serial IIC Adapter

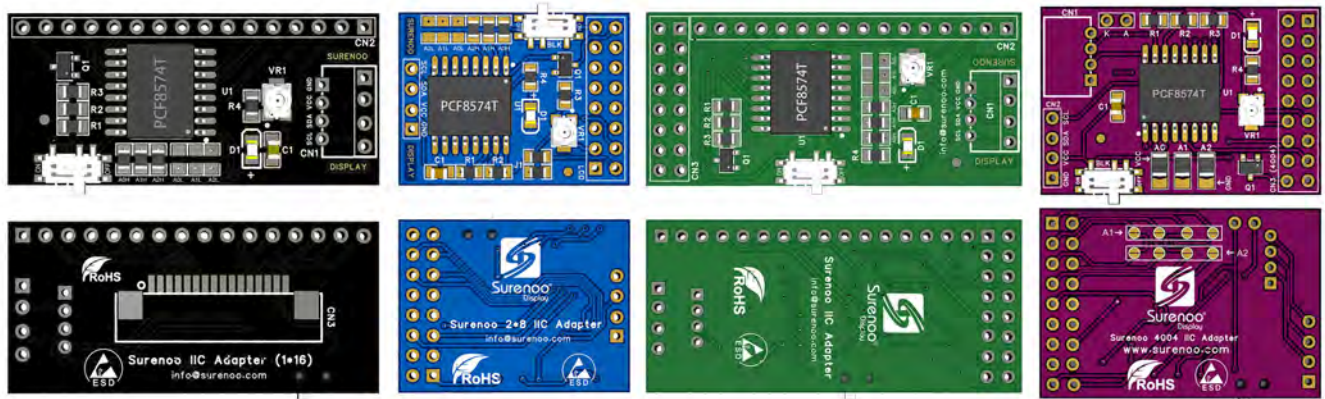

Contents

1. SPECIFICATIONS

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**

- 1.4 DC Electrical Characteristics**
- 1.5 Backlight & LED Characteristics**

2. MODULE STRUCTURE

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Timing Characteristics**
- 2.4 Instruction Table**
- 2.5 Character Generator ROM**
- 2.6 Inspection Specification**

1. SPECIFICATIONS

1.1 Features

Item	Standard Value
Display Type	8characters ×1 lines
LCD Type	STN, NEGATIVE (BLUE) ,TRANSMISSIVE
Driver Condition	LCD Module : 1/8Duty , 1/4Bias
Viewing Direction	6 O'clock
Backlight Type	SIDE WHITE
Interface	8-bit MPU interface
Driver IC	AIP31066

1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	84(L) * 44(W) * Max 13.8(T)	mm
Viewing Area	62(L) * 17.8(W)	mm
Dot size	1.28(W) × 1.32(H)	mm
Dot pitch	1.36(W) × 1.4(H)	mm
Character size	6.72(W) × 11.12(H)	mm

1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
System Power Supply Voltage	VDD	-	-0.3	5.5	V
LCD Driver Supply Voltage	VLCD	-	VDD-12	VDD-0.3	V
Input Voltage	V _{IN}	-	-0.3	VDD + 0.3	V
Operating Temperature	T _{OP}	-	-20	70	°C
Storage Temperature	T _{ST}	-	-30	80	°C
Storage Humidity	H _D	Ta < 40 °C	20	70	%RH

1.4 DC Electrical Characteristics

VDD = 5.0V ± 0.2V, GND = 0V, Ta = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Logic Supply Voltage	VDD	-	4.8	5.0	5.2	V
Input High Voltage	V _{IH}	-	0.8VDD	-	VDD	V
Input Low Voltage	V _{IL}	-	GND	-	0.3VDD	V
Output High Voltage	V _{OH}	-	0.7VDD	-	VDD	V
Output Low Voltage	V _{OL}	-	GND	-	0.2VDD	V

1.5 Backlight Characteristics

LCD Module without LED Backlight

Electrical / Optical Characteristics

Ta=25°C


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	V _f	I _f =20mA	4.8	5.0	5.2	V
Reverse Current	I _r	I _f =5v			--	uA
Average Brightness	I _V	I _f =20mA				cd/m ²
Wavelength (Without LCD)	λ _d	I _f =20mA	--	--	--	nm
Luminous Intensity (without LCD)	L _v Sub	I _f =20mA				cd/m ²
Uniformity	Δ%	I _v Min / I _v Max *100%	--	-	-	%
Color	WHITE					



2. MODULE STRUCTURE


2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

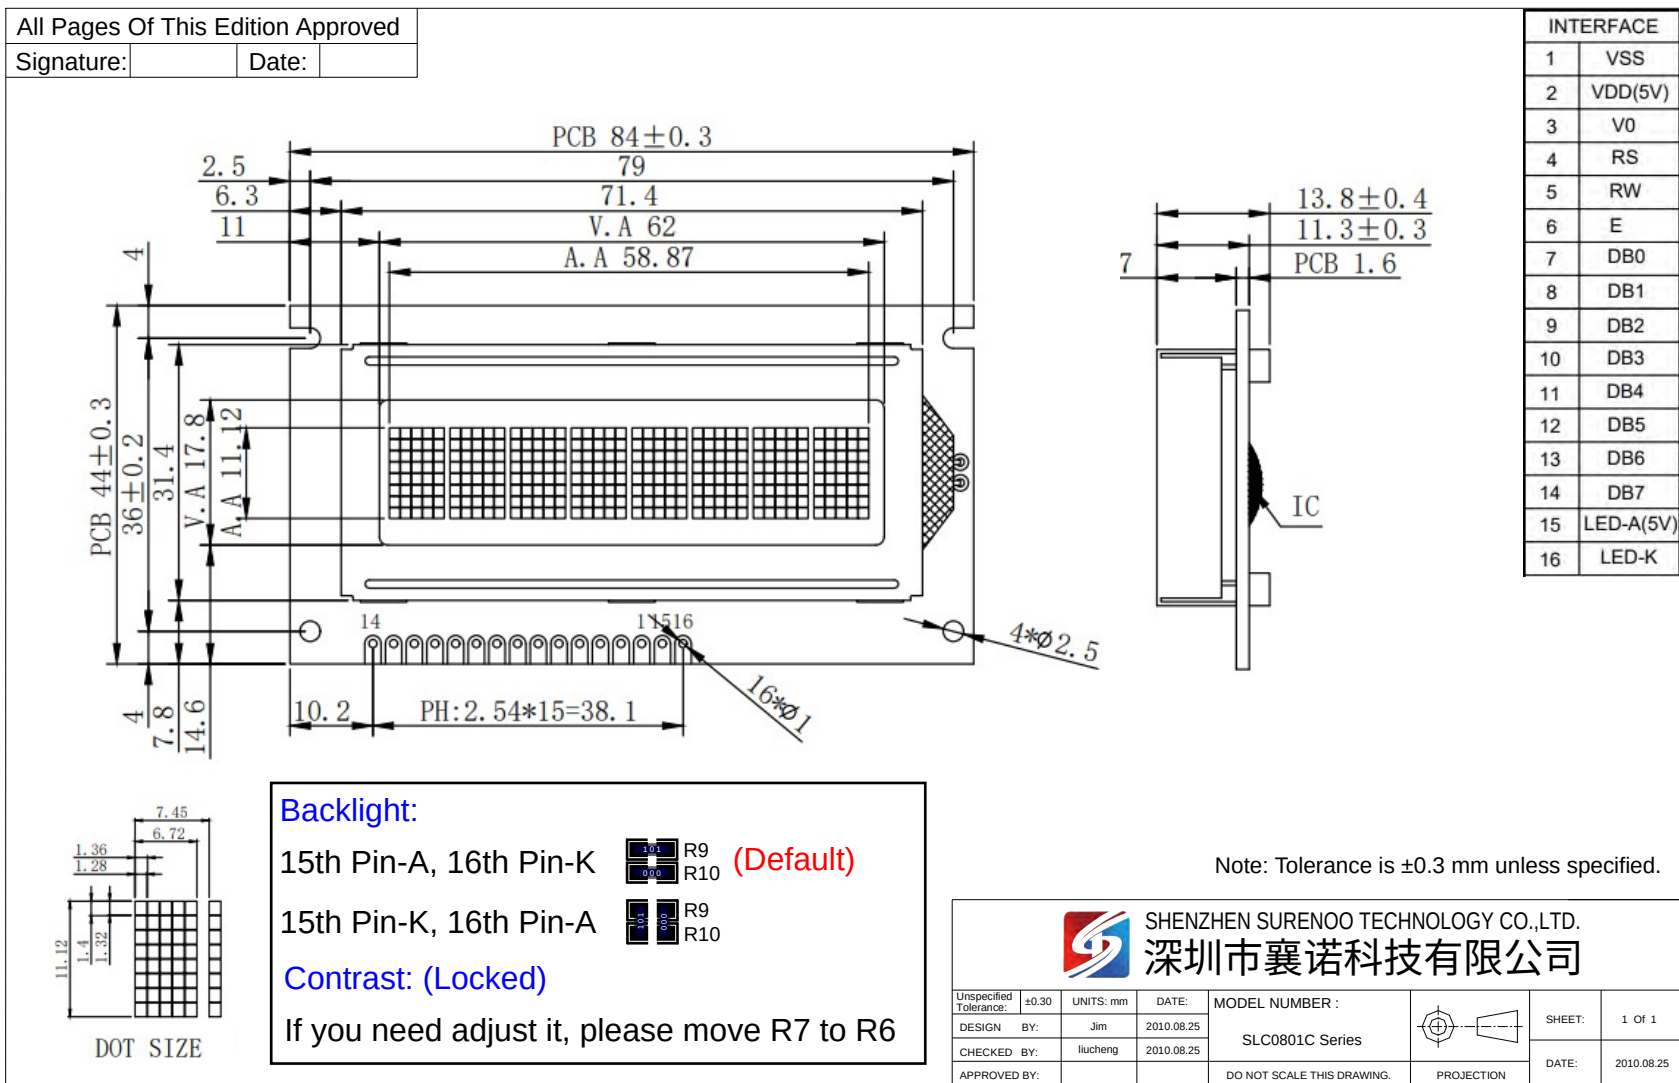

2.2 Interface Pin Description

No.	Symbol	Function
1	VSS	Ground (0V)
2	VDD	Supply Voltage for Logic (+5.0V)
3	VO	Contrast Adjustment
4	RS	Data/Instruction Select
5	R/W	Read/Write Select
6	E	Enable Signal
7-14	DB0-DB7	Data Bus
15	LED_A	LED Power Supply + (5.0V)
16	LED_K	LED Power Supply - (0V)

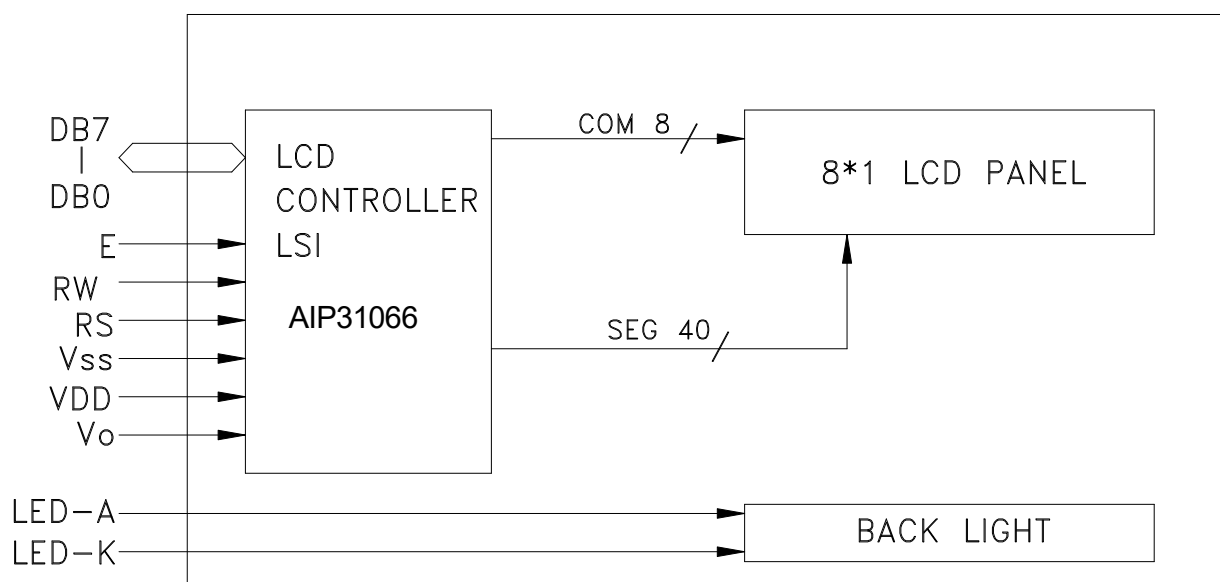

Character located 1 2 3 4 5 6 7 8

DDRAMaddress	00	01	02	03	04	05	06	07
--------------	----	----	----	----	----	----	----	----

2.3 Timing Characteristics

DC Characteristics

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Operating Current	IDD	-	0.55	0.8	mA	External clock (Note)
Input High Voltage	V _{IH1}	2.2	-	VDD	V	Pins:(E, RS, R/W, DB7 - 0)
Input Low Voltage	V _{IL1}	-0.3	-	0.6	V	
Input High Voltage	V _{IH2}	VDD-1	-	VDD	V	Pin OSC1
Input Low Voltage	V _{IL2}	-0.2	-	1.0	V	Pin OSC1
Input High Current	I _{IH}	-2.0	-	2.0	μA	Pins: (RS, R/W, DB7 - 0)
Input Low Current	I _{IL}	-20.0	-50.0	-100.0	μA	VDD = 5.0V
Output High Voltage (TTL)	V _{OH1}	2.4	-	VDD	V	I _{OH} = - 0.1mA Pins: DB7 - 0
Output Low Voltage (TTL)	V _{OL1}	-	-	0.4	V	I _{OL} = 0.1mA Pins: DB7 - 0
Output High Voltage (CMOS)	V _{OH2}	0.9VDD	-	VDD	V	I _{OH} = - 40.0μA, Pins: CL1, CL2, M, D
Output Low Voltage (CMOS)	V _{OL2}	-	-	0.1VDD	V	I _{OL} = 40.0μA, Pins: CL1, CL2, M, D
Driver ON Resistance (COM)	R _{COM}	-	-	20.0	KΩ	I _O = ±50.0μA, V _{LCD} = 4.0V Pins: COM16 - 1
Driver ON Resistance (SEG)	R _{SEG}	-	-	30.0	KΩ	I _O = ±50.0μA, V _{LCD} = 4.0V Pins: SEG40 - 1
LCD Voltage	V _{LCD}	3.0	-	11.0	V	VDD - V5, 1/4 bias or 1/5 bias


Note: F_{OSC} = 250.0KHz, VDD = 5.0V, pin E = "L", RS, R/W, DB7 - 0 are open, all outputs are no loads.

AC Characteristics

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
OSC Frequency	F _{OSC1}	190.0	270.0	350.0	KHz	VDD = 5.0V Rf = 91.0KΩ±2%


Timing Diagram

Writing mode

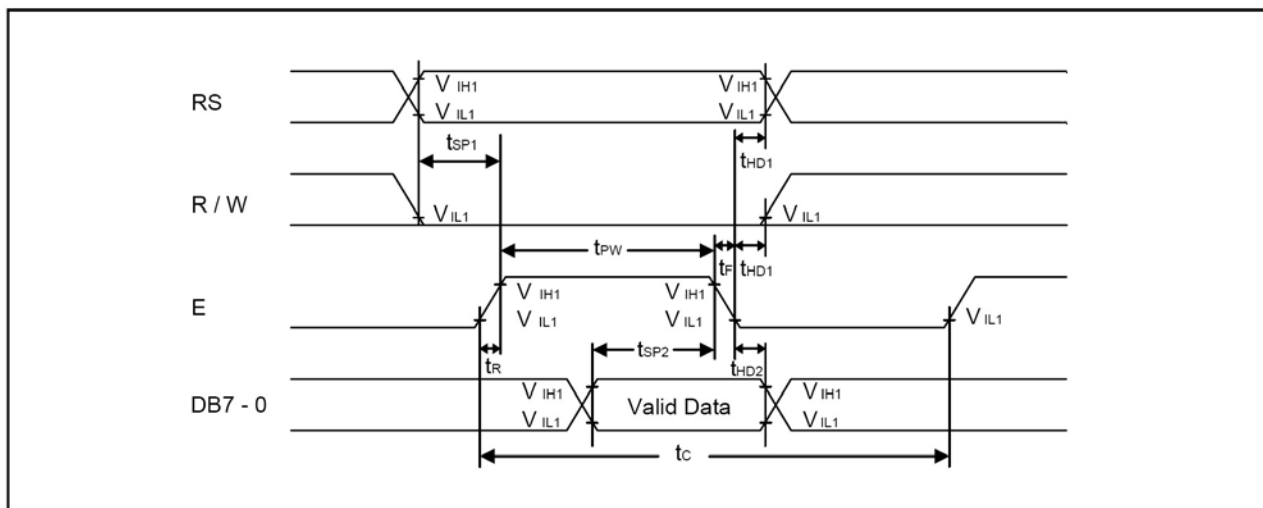

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
E Cycle Time	t_C	400.0	-	-	ns	Pin E
E Pulse Width	t_{PW}	150.0	-	-	ns	Pin E
E Rise/Fall Time	t_R, t_F	-	-	25.0	ns	Pin E
Address Setup Time	t_{SP1}	30.0	-	-	ns	Pins: RS, R/W, E
Address Hold Time	t_{HD1}	10.0	-	-	ns	Pins: RS, R/W, E
Data Setup Time	t_{SP2}	40.0	-	-	ns	Pins: DB7 - 0
Data Hold Time	t_{HD2}	10.0	-	-	ns	Pins: DB7 - 0

Read mode

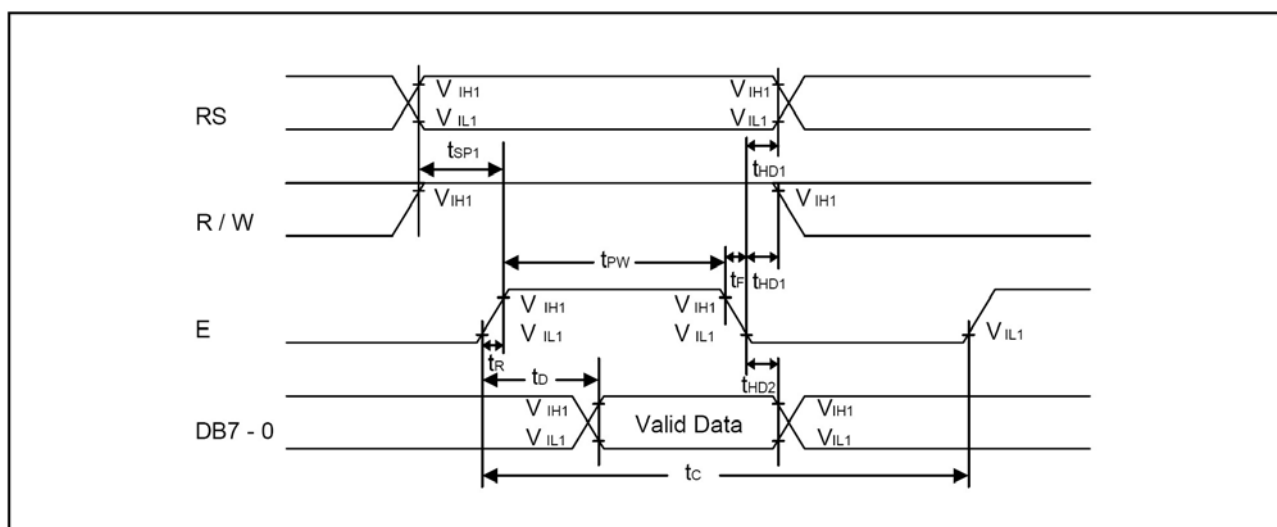

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
E Cycle Time	t_C	400.0	-	-	ns	Pin E
E Pulse Width	t_W	150.0	-	-	ns	Pin E
E Rise/Fall Time	t_R, t_F	-	-	25.0	ns	Pin E
Address Setup Time	t_{SP1}	30.0	-	-	ns	Pins: RS, R/W,E
Address Hold Time	t_{HD1}	10.0	-	-	ns	Pins: RS, R/W,E
Data Output Delay Time	t_D	-	-	100.0	ns	Pins: DB7 - 0
Data hold time	t_{HD2}	20.0	-	-	ns	Pin DB7 - 0

2.4 Instruction Table

◆ Display Control Instruction

Instruction	Instruction Code										Description	Execution time ($F_{OSC} = 270KHz$)
	RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "20H" to DDRAM and set DDRAM address to "00H" from AC	1.52ms
Return Home	0	0	0	0	0	0	0	0	1	-	Set DDRAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.52ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	S	Assign cursor moving direction and enable the shift of entire display	38 μ s
Display ON/OFF Control	0	0	0	0	0	0	1	D	C	B	Set display(D), cursor(C), and blinking of cursor(B) on/off control bit.	38 μ s
Cursor or Display Shift	0	0	0	0	0	1	S/C	R/L	-	-	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	38 μ s
Function Set	0	0	0	0	1	DL	N	F	-	-	Set interface data length (DL: 8-bit/4-bit), numbers of display line (N: 2-line/1-line) and, display font type (F: 5x10 dots/5x8 dots)	38 μ s
Set CGRAM Address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0	Set CGRAM address in address counter.	38 μ s
Set DDRAM Address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Set DDRAM address in counter	38 μ s
Read Busy Flag and Address Counter	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	38 μ s
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data from internal RAM (DDRAM/CGRAM).	38 μ s


* "-": don't care

2.5 Character Generator ROM

Upper 4 bit Lower 4 bit	LLLL	LLLR	LLRL	LLRH	LRLR	LRLH	LRLH	LRLH	RLRR	RLRH	RLRL	RLRH	RLRH	RLRH	RLRH	RLRH
LLLL				0	1	2	3	4	5	6	7	8	9	A	B	C
LLLR			!	1	A	Q	a	4					.	ア	チ	△
LLRL			"	2	B	R	b	r					「	イ	ウ	×
LLRH			#	3	C	S	c	s					」	ウ	テ	モ
LRLR			\$	4	D	T	d	t					「	エ	ト	ナ
LRLH			%	5	E	U	e	u					・	オ	ナ	ユ
LRLH			&	6	F	V	f	v					ラ	カ	ニ	ヨ
LRRH			'	7	G	W	g	w					ア	キ	ヌ	ラ
RLRR			(	8	H	X	h	x					イ	ウ	キ	リ
RLRH			)	9	I	Y	i	y					ウ	ク	ル	リ
RLRL			*	:	J	Z	j	z					エ	コ	ル	レ
RLRH			+	:	K	L	k	l					オ	サ	ヒ	ロ
RLRH			,	<	L	¥	1	1					カ	シ	フ	ワ
RLRH			—	=	M	J	m	j					ユ	ヌ	へ	ひ
RLRH			.	>	N	^	n	*					ヨ	セ	ホ	マ
RLRH			/	?	O	_	o	*					ウ	リ	マ	ロ

2.6 Inspection Specification



- ◆ Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II .
- ◆ Equipment : Gauge、MIL-STD、Powertip Tester、Sample
- ◆ Defect Level : Major Defect AQL 0.4; Minor Defect AQL 1.5 .
- ◆ OUT Going Defect Level : Sampling .
- ◆ Manner of appearance test :
 - (1). The test be under 40W×2 fluorescent light ' and distance of view must be at 30 cm.
 - (2). The test direction is base on about around 45° of vertical line. (Fig. 1)
 - (3). Definition of area . (Fig. 2)

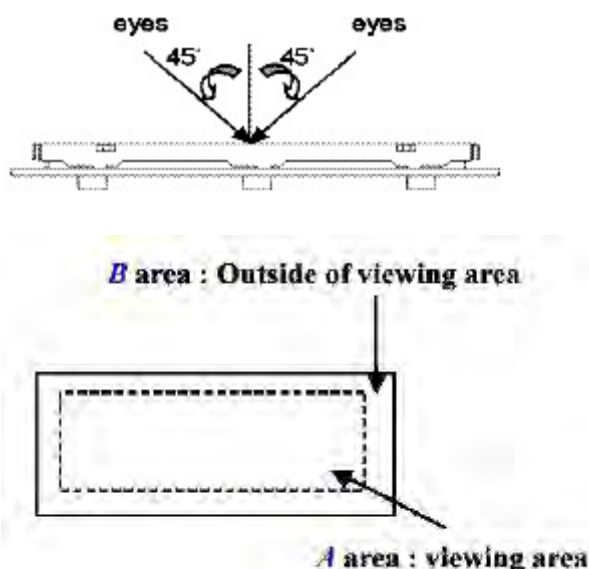

◆ Specification:



NO	Item	Criterion	level
01	Product condition	1.1 The part number is inconsistent with work order of Production.	Major
		1.2 Mixed production types.	Major
		1.3 Assembled in inverse direction.	Major
02	Quantity	2.1 The quantity is inconsistent with work order of production.	Major
03	Outline dimension	3.1 Product dimension and structure must conform to Structure diagram.	Major
04	Electrical Testing	4.1 Missing line character、dot and icon.	Major
		4.2 No function or no display.	Major
		4.3 Output data is error.	Major
		4.4 LCD viewing angle defect.	Major
		4.5 Current consumption exceeds product specifications.	Major
05	Black or white dot、scratch、contamination Round type	5.1 Round type: 5.1.1 display only : ·White and black spots on display $\leq 0.25\text{mm}$, no more than Four white or black spots present. ·Densely spaced : NO more than two spots or lines within 3mm	Minor

◆ Specification :

NO	Item	Criterion	level
05	Black or white dot、scratch、contamination Round type  $\Phi = (x+y)/2$ 	5.1.2 Nom-display : Dimension (diameter : Φ) Acceptance(Q'ty) $\Phi \leq 0.10\text{mm}$ Accept no dense $0.10\text{mm} < \Phi \leq 0.20\text{mm}$ 3 $0.20\text{mm} < \Phi \leq 0.25\text{mm}$ 2 Total 4 5.1.3 Line type: Dimension (diameter : Φ) Acceptance (Q'ty) Length width A area B area --- $w \leq 0.03\text{mm}$ Accept no dense Don't count $L \leq 3.0\text{mm}$ $0.03\text{mm} < \Phi \leq 0.05\text{mm}$ 4 Don't count $L \leq 2.5\text{mm}$ $0.05\text{mm} < \Phi \leq 0.075\text{mm}$ Don't count --- $w > 0.075\text{mm}$ As round type	Minor

06	Polarizer Bubble	Dimension (diameter : Φ) A area Acceptance(Q'ty) B area $\Phi \leq 0.20\text{mm}$ Accept no dense Don't count $0.20\text{mm} < \Phi \leq 0.50\text{mm}$ 3 Don't count $0.50\text{mm} < \Phi \leq 1.00\text{mm}$ 2 Don't count $\Phi > 1.00\text{mm}$ 0 Don't count Total quantity 4 Don't count	Minor
07	The crack of glass	● Glass Crack: 7.1 Crack on the circuit of electrode terminal :  X Y Z Front $X \leq 1/5 a$ $Y \leq 1/2 D$ $Z \leq t$ Back Neglect	Minor

◆ Specification :

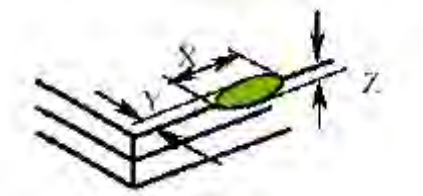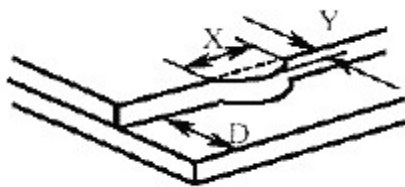NO	Item	Criterion	Level
07	The crack of glass X: The length of Crack Y: The width of crack Z: The thickness of crack D: terminal length T: The thickness of glass A : The length of glass	● Glass Crack: 7.2 General glass crack and corner edge: 7.2.1  X Y Z Neglect Out A area Neglect 7.2.2  X Y Z Neglect Out A area Neglect	Minor
		7.3 Glass remain:  X Y Neglect $\leq 1/3 d$	Minor



◆ Specification :

NO	Item	Criterion	Level
07	The crack of glass X: The length of Crack Y: The width of crack Z: The thickness of crack D: terminal length T: The thickness of glass A : The length of glass	7.4 Corner crack and medial crack: Crack can't enter viewing area Crack can't exceed the half of width of SP width of SP $\frac{X}{Y} \leq \frac{1}{5a}$ $\frac{Z}{T} \leq \frac{1}{2t}$	Minor
08	Backlight elements	8.1 Backlight can't work normally.	Major
		8.2 Backlight doesn't light or color is wrong.	Major
		8.3 Illumination source flickers when lit.	Major
09	General appearance	9.1 pin type must match type in specification sheet	Major
		9.2 No short circuits in components on PCB or FPC	Major
		9.3 Product packaging must the same as specified on packaging specification sheet.	Major
		9.4 The folding and peeled off in polarizer are not acceptable	Major
		9.5 The PCB or FPC between B/L assembled distance (PCB or FPC) is $\leq 1.5\text{mm}$	Major